



Test Phone Contractor 3-way lead

“Loaded with features, a great contractor butt”

The basic workhorse buttinski

The Aegis CZ20018 Test Phone - Contractor (3-way lead) is designed for use by line installers, repair technicians and other authorised personnel for telecommunications line testing and temporary communications.

The CZ20018 Test Phone operates in Talk, Ring and Monitor modes, each of which is easily selected by the user. It also uses tone and Pulse Dial and includes a Polarity indicating LED.

The high impedance design protects against disturbing data, voice or signaling. Added versatility includes reverse polarity indication.

Other features of the CZ20018 Test Phone are last number redial, 10 number storage, water resistance and includes a field replacable line cord and durable belt clip.



Test Phone Contractor

Fitted with a Multi-Way lead set as standard (Krone, RJ, and clips) the Aegis CZ20018 Test Phone - Contractor (3-way lead) is ready to perform every time. Light weight and loaded with features, the CZ20018 Test Phone - Contractor (3-way lead) is a great tool for occasional and regular users.

01

Talk/Ring/Monitor modes,
Polarity indicating LED,
Last number redial, 10
number storage memory

water
resistant

04


The Aegis test telephone
is fitted with a heavy duty
durable belt clip to provide
fast and easy access

02

Fitted with a Multi-
Way lead set as
standard (Krone,
RJ, and clips) the
CZ20018 is ready to
perform every time.

03

Field replaceable
line cord, light
weight and loaded
with features

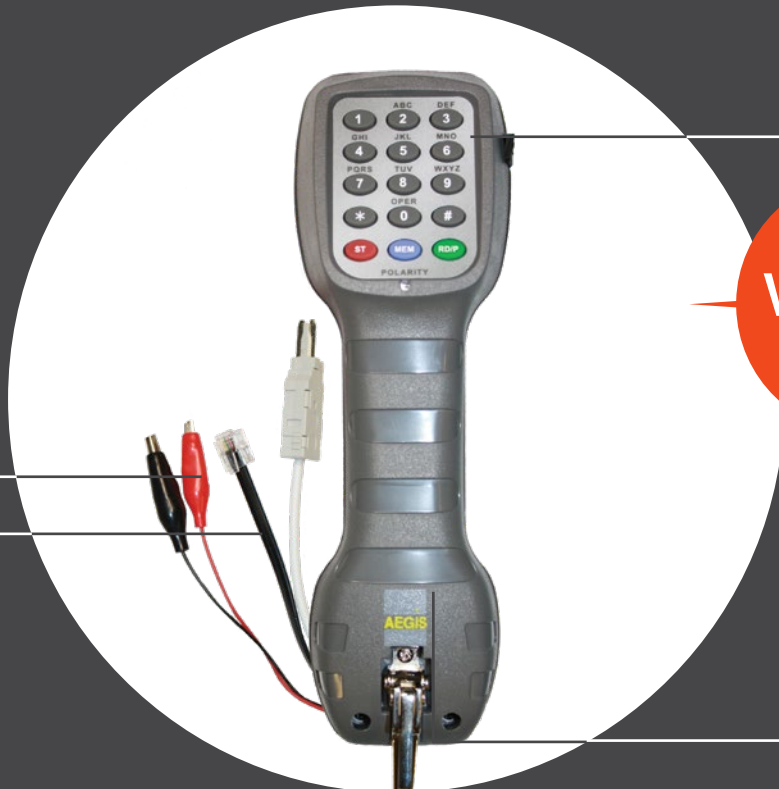

SPECIFICATIONS

1

Spec info

Loop: 4k Ω max at 48VDC
Min 15mA current (nom)
Resistance: 150 Ω at 80mA (typical)
Monitor: Ring: 600 Ω at 1kHz
Monitor: 100k Ω at 1kHz

2

Rotary Dialing

Pulse Rate: 10 +/- 0.5 pulses/sec
% Break: 60% +/- 2%

DTMF Output

Tone Frequency Error: +/-1.5%
Level of Tone Pair: +2dBm max, -8dB min

3

Physical

Dimensions: 224 x 712 x 700mm
(l x w x h)
Weight: 380 grams
Battery: CR2032 - 3VDC